



# PolySep Green Oil Water Separators

5-60 m<sup>3</sup>/min

Keep the environment clean with PolySep Green. Our efficient oil water separators are an effective solution to separate and permanently adsorb virtually all lubricants.



## Unrivaled Performance and Efficiency


Today's industrial working environments present a host of variables that create challenges in designing an effective oil water separator that is both effective and long lasting. Some of these challenges include ambient humidity and extreme temperatures, different coolant types, excessive operating hours, equipment age, compressor loading and residual oil that passes through to the environment.

To meet these challenges, PolySep offers a new modular approach allowing you to size and scale the unit as needed. PolySep Green also features specially coated Zeolite adsorption media that withdraws and permanently adsorbs all lubricants, especially highly emulsified ones like polyglycols that are difficult to separate without the use of expensive, oversized separators.

### The Responsible Choice

By minimizing the cost associated with the disposal of fluids, and keeping them out of the environment, PolySep Green oil water separators help you to stay compliant with environmental regulations and avoid costly fines. The separator is also designed to operate with minimal maintenance or downtime, resulting in no mess or overflow.

### How PolySep Green Works

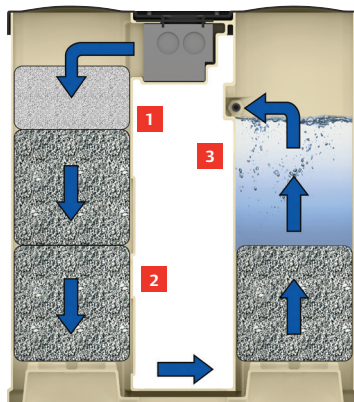

- 1 Oily water flows through pre-filter removing contaminants
- 2 Multiple Zeolite media zones capture oil
- 3 Clean water exits separator

### PolySep Green Oil Water Separator Features

- **Zeolite filtration media** adsorbs virtually all lubricants without the need to derate and oversize separator
- **Scalable modular design** allows user to vary capacity due to changing operating parameters
- **Pre-filter removes contaminants** that cause fouling and clogging
- **Handles compressor flow requirements** up to 60 m<sup>3</sup>/min
- **Complies with environmental regulations** and minimizes fluid disposal costs
- **Streamlined design** affords simple, reliable operation with few moving parts to reduce maintenance and downtime

# The PolySep Advantage

## Why do I need an oil water separator?

Compressor systems produce large amounts of condensate containing oil. It is important to remove the oil before condensate is released into the environment, since only small amounts can cover a vast surface area and harm aquatic life. When properly installed and sized correctly, PolySep Green separators provide condensate discharge levels < 15 ppm at standard conditions.

## What adsorption media do I need?

Polypropylene and carbon media may be used effectively on lighter than water oils, like polyalphaolefins or mineral oils. However, highly emulsified oils, like Ultra Coolant, have nearly the same specific gravity as water and are not easily separated from it. For these cases, Zeolite media is ideal, because its special properties enable it to attract and bind the oil molecules, permanently removing them from the water.

## Why PolySep is the Right Choice—No Exclusions, No Derating

Competitive units that don't use Zeolite media specifically exclude polyglycols or indicate that special kits are needed. In such cases, those units must be derated by 50% or more, meaning an oversized separator that costs you more. So when comparing separators, it is critical to check the media type and determine proper sizing.

## Modular, Scalable Solutions

PolySep Green oil water separators come in 8 standard sizes, handling air flow from 5 to 60 m<sup>3</sup>/min. The media is designed to last 3-6 months @ 8,000 hours/year of operation and 6-12 months @ 4,000 hours/year. Each model has standardized, modular media bags—add more bags to increase capacity and media life.



PolySep Performance Data												
Model	Part Number	Air Flow m <sup>3</sup> /min	Frame Size (L x W x H) cm	Zeolite Media for Base Model kg	Bag Size kg	Number of Zeolite Bags for Base Model	Maximum Media Capacity	Capacity for Additional Zeolite Bags	Diffuser element + prefilter	Single Zeolite Bag	*Media Kit	
PGX1	17933421	5	65 x 51 x 17	9	3	3	12	1	17933529	17933533	17933363	
PGX2	17933422	10	83 x 70 x 21	20	10	2	50	3	17933530	17933534	17933364	
PGX3	17933423	15	83 x 70 x 21	30	10	3	50	2	17933530	17933534	17933365	
PGX4	17933424	20	83 x 70 x 21	40	10	4	50	1	17933530	17933534	17933366	
PGX6	17933426	30	83 x 70 x 21	50	10	5	50	0	17933530	17933534	17933368	
PGX8	17933427	40	110 x 95 x 35	70	10	7	100	3	17933531	17933535	17933387	
PGX10	17933429	50	110 x 95 x 35	80	10	8	100	2	17933531	17933535	17933388	
PGX12	17933428	60	110 x 95 x 35	90	10	9	100	1	17933531	17933535	17933389	

\*Diffuser element + prefilter + standard number of Zeolite bags



Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$14 billion global business committed to a world of sustainable progress and enduring results. For more information, visit [www.ingersollrand.com](http://www.ingersollrand.com).

[IngersollRandProducts.com](http://IngersollRandProducts.com)



Ingersoll Rand, IR and the IR logo are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialised equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Any designs, diagrams, pictures, photographs and specifications contained within this document are for representative purposes only and may include optional scope and/or functionality and are subject to change without notice or obligation.